

Patch Cords:


Features:

- ▶ Compliant with IEC & Bellcore specifications
- ▶ Low insertion loss & high return loss
- ▶ Highly stable mating & de-mating characteristics
- ▶ Contact us with your connector & performance specifications




Patch Cord Specifications

SPECIFICATIONS		
INSERTION LOSS		< 0.2 dB
RETURN LOSS	UPC	> 55 dB
	APC	> 65 dB
MATING REPEATABILITY		< 0.2 dB (500 times)
CHANGEABILITY		≤ 0.1 dB
HUMIDITY RANGE		5% to 95% (non-condensing)
TEMPERATURE RANGE		-40°C to +80°C
APC POLISHING GEOMETRY		8 Degree

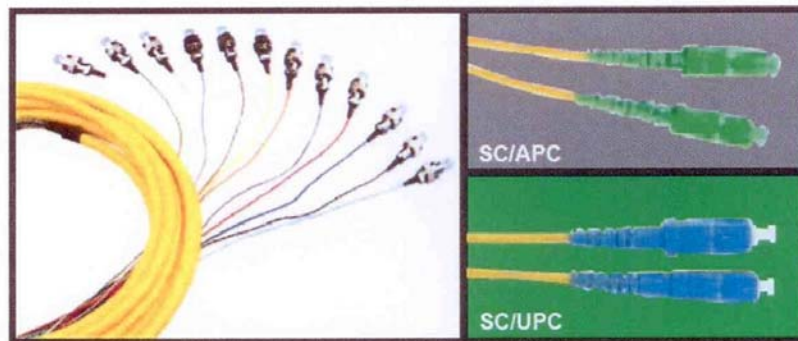

Ordering Information

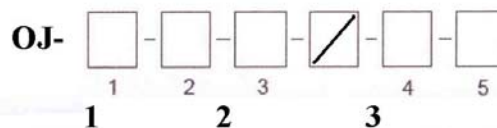

Length	Connector #1	Polishing	Connector #2	Polishing
01: 1M	1: SC	P: PC	1: SC	P: PC
02: 2M	2: ST	U: UPC	2: ST	U: UPC
05: 5M	3: FC	A: APC	3: FC	A: APC
10: 10M	4: LC		4: LC	

QUALITY FIBER AND RF INC
 (772)545-9757

8941 SE DUNCAN ST
HOBE SOUND, FL 33455